

FEATURES


Load Capacity Up to 175 lbs.

- Bright Chrome Finish
- Matching Chrome Thread Guards for wheels
- Non-Marking Soft-Neoprene Rubber wheels
- Dual Ball Swivel Raceways for added strength
- Total Lock Brake models lock both swivel and wheel
- **Precision ball bearings in wheels for easier rollability**
- Upper raceway seal to prevent dirt and dust build-up
- Designed to provide your equipment with a smooth and quiet roll

TOP PLATES

TP2: 2" diameter caster: 13/16" x 1-1/4" through 1-7/8" slotted


TP3: 3" diameter caster: 13/16" x 1-7/8"

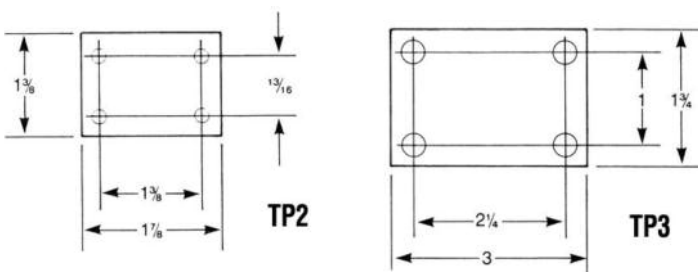

STEMS

Grip Ring Stem

Specify: **GR01**



Hollow Rivet

Recommended for use with 3/8" diameter fittings

Threaded Stem

Specify: **TS06**



APPLICATIONS

- Laboratory Equipment
- IV Stands
- Mobile Computer Stands
- Medical Equipment



**Plate Caster with
SOFT NEOPRENE RUBBER WHEELS
and Precision Ball Bearings**



**Stem Caster with
SOFT NEOPRENE RUBBER WHEELS
and Precision Ball Bearings**



**Hole Caster with
SOFT NEOPRENE RUBBER WHEELS
and Precision Ball Bearings**

CASTER SPECIFICATIONS

Diameter (in.)	Tread Width (in.)	Wheel Description	Capacity (lb)	Load Height in (mm)	Swivel Radius in (mm)	Wheel Bearing	Part Number
SWIVEL TOP PLATE MODELS							
2	1	Neoprene Rubber	125	2-15/16" (75)	2" (51)	Precision Ball	1MC-NR-P-0210-S-TP2
3	1	Neoprene Rubber	175	4-5/32" (105)	2-13/16" (71)	Precision Ball	1MC-NR-P-0310-S-TP2
SWIVEL PLATE TOTAL LOCK MODELS							
2	1	Neoprene Rubber	125	2-15/16" (75)	2" (51)	Precision Ball	1MC-NR-P-0210-TL-TP2
3	1	Neoprene Rubber	175	4-5/32" (105)	2-13/16" (71)	Precision Ball	1MC-NR-P-0310-TL-TP2
GRIP RING STEM MODELS							
2	1	Neoprene Rubber	125	2-11/16" (68)	2" (51)	Precision Ball	1MC-NR-P-0210-S-GR01
3	1	Neoprene Rubber	175	4" (102)	2-13/16" (71)	Precision Ball	1MC-NR-P-0310-S-GR01
GRIP RING STEM TOTAL LOCK MODELS							
2	1	Neoprene Rubber	125	2-11/16" (68)	2" (51)	Precision Ball	1MC-NR-P-0210-TL-GR01
3	1	Neoprene Rubber	175	4" (102)	2-13/16" (71)	Precision Ball	1MC-NR-P-0310-TL-GR01
THREADED STEM MODELS							
3	1	Neoprene Rubber	175	4" (102)	2-13/16" (71)	Precision Ball	1MC-NR-P-0310-S-TS06
THREADED STEM TOTAL LOCK MODELS							
3	1	Neoprene Rubber	175	4" (102)	2-13/16" (71)	Precision Ball	1MC-NR-P-0310-TL-TS06
HOLLOW KINGPIN MODELS							
2	1	Neoprene Rubber	125	2-11/16" (68)	2" (51)	Precision Ball	1MC-NR-P-0210-S-HK04
3	1	Neoprene Rubber	175	4" (102)	2-13/16" (71)	Precision Ball	1MC-NR-P-0310-S-HK04
HOLLOW KINGPIN TOTAL LOCK MODELS							
2	1	Neoprene Rubber	125	2-11/16" (68)	2" (51)	Precision Ball	1MC-NR-P-0210-TL-HK04
3	1	Neoprene Rubber	175	4" (102)	2-13/16" (71)	Precision Ball	1MC-NR-P-0310-TL-HK04

SWIVEL PLATE

GRIP RING SWIVEL

THREADED STEM SWIVEL

HOLE TYPE SWIVEL



SWIVEL PLATE TOTAL LOCK

GRIP RING TOTAL LOCK

THREADED STEM TOTAL LOCK

HOLE TYPE TOTAL LOCK

PRECISION BALL BEARINGS ARE STANDARD IN ALL NEOPRENE WHEELS