

CONSTRUCTION FEATURES


Load Capacity Up to 900 lbs.

- Constructed of stainless steel, giving you the quality necessary for most medical and pharmaceutical applications at an affordable price.
- Fork legs, top plate and yoke base are made of 1/4" thick 304 polished stainless steel for added corrosion protection
- Total Lock brake models lock both brake and swivel
- Dual Ball Swivel Raceways for added strength
- Swivel seals are standard for added protection
- Stainless axles provided with grease fitting
- Grease fitting in swivel raceway



APPLICATIONS

- Food Service
- Case Carts
- Utility Carts
- Medical Equipment
- Institutional Equipment
- Laboratory Equipment
- Animal Cages
- Pharmaceutical Equipment

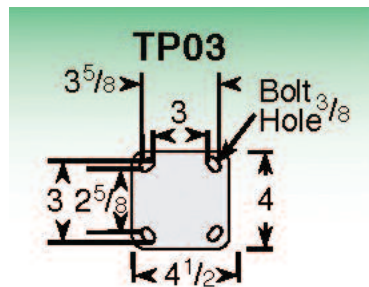

Nylacron™ Wheels

With Precision Ball Bearings for Any Application
(NY/MD, NY/HSB, NY/MC, NY/GF)

Nylacron™ wheels with proper sized precision bearings are made to fit in any rig hub length and axle size.

Nylacron™ wheels have greater load capacity ratings with better rollability while requiring less maintenance and have longer life.

CASTER SPECIFICATIONS

Wheel Type (Wheel Code)	Dia. (in.)	Width (in.)	Capacity (lbs.)	OAH (in.)	Whl Hub (in.)	Swl. Lead (in.)	Swivel Part Number Add B, P, PL, R or T*
NYLACRON™ MD (NY/MD) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	3	2	900	5-1/4	2-7/16	1-1/2	4-16MPSS-NY/MD-P-0320-S
	4	2	900	5-5/8	2-7/16	1-1/2	4-16MPSS-NY/MD-P-0420-S
	5	2	900	6-1/2	2-7/16	2	4-16MPSS-NY/MD-P-0520-S
	6	2	900	7-1/2	2-7/16	2-3/16	4-16MPSS-NY/MD-P-0620-S
	8	2	900	9-1/2	2-7/16	2-1/4	4-16MPSS-NY/MD-P-0820-S
NYLACRON™ MONOCAST (NY/MC) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	3	2	900	5-1/4	2-7/16	1-1/2	4-16MPSS-NY/MC-P-0320-S
	4	2	900	5-5/8	2-7/16	1-1/2	4-16MPSS-NY/MC-P-0420-S
	5	2	900	6-1/2	2-7/16	2	4-16MPSS-NY/MC-P-0520-S
	6	2	900	7-1/2	2-7/16	2-3/16	4-16MPSS-NY/MC-P-0620-S
	8	2	900	9-1/2	2-7/16	2-1/4	4-16MPSS-NY/MC-P-0820-S
SOLID ELASTOMER (SE) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	3	2	500	5-1/4	2-7/16	1-1/2	4-16MPSS-SE-P-0320-S
	4	2	700	5-5/8	2-7/16	1-1/2	4-16MPSS-SE-P-0420-S
	5	2	800	6-1/2	2-7/16	2	4-16MPSS-SE-P-0520-S
	6	2	900	7-1/2	2-7/16	2-3/16	4-16MPSS-SE-P-0620-S
	8	2	900	9-1/2	2-7/16	2-1/4	4-16MPSS-SE-P-0820-S
POLYOLEFIN (PO) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	4	2	500	5-5/8	2-7/16	1-1/2	4-16MPSS-PO-P-0420-S
	5	2	650	6-1/2	2-7/16	2	4-16MPSS-PO-P-0520-S
	6	2	700	7-1/2	2-7/16	2-3/16	4-16MPSS-PO-P-0620-S
	8	2	900	9-1/2	2-7/16	2-1/4	4-16MPSS-PO-P-0820-S
KRYPTONIC™ (KR) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	4	2	500	5-5/8	2-7/16	1-1/2	4-16MPSS-KR-P-0420-S
	5	2	650	6-1/2	2-7/16	2	4-16MPSS-KR-P-0520-S
	6	2	700	7-1/2	2-7/16	2-3/16	4-16MPSS-KR-P-0620-S
	8	2	900	9-1/2	2-7/16	2-1/4	4-16MPSS-KR-P-0820-S
NYLON (NN) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	4	2	700	5-5/8	2-7/16	1-1/2	4-16MPSS-NN-P-0420-S
	5	2	800	6-1/2	2-7/16	2	4-16MPSS-NN-P-0520-S
	6	2	900	7-1/2	2-7/16	2-3/16	4-16MPSS-NN-P-0620-S
	8	2	1000	9-1/2	2-7/16	2-1/4	4-16MPSS-NN-P-0820-S
STAINLESS STEEL (SS) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	4	2	800	5-5/8	2-7/16	1-1/2	4-16MPSS-SS-P-0420-S
	5	2	900	6-1/2	2-7/16	2	4-16MPSS-SS-P-0520-S
	6	2	900	7-1/2	2-7/16	2-3/16	4-16MPSS-SS-P-0620-S
	8	2	900	9-1/2	2-7/16	2-1/4	4-16MPSS-SS-P-0820-S
THERMOPLASTIC URETHANE (TPU) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	5	2	440	6-1/2	2-7/16	2	4-16MPSS-TPU-P-0520-S
	6	2	660	7-1/2	2-7/16	2-3/16	4-16MPSS-TPU-P-0620-S
	8	2	880	9-1/2	2-7/16	2-1/4	4-16MPSS-TPU-P-0820-S
ELASTIC RUBBER / NYLON CORE (ER/B/NN) WHEELS WITH STAINLESS STEEL PRECISION BALL BEARING							
	6	2	550	7-1/2	2-7/16	2-3/16	4-16MPSS-ER/B/NN-P-0620-S
	8	2	660	9-1/2	2-7/16	2-1/4	4-16MPSS-ER/B/NN-P-0820-S

*Add "B" for Ball Bearing, "P" for Precision Bearing, "PL" for Plain Bearing, "R" for Roller Bearing or "T" for Tapered Bearing.

All load ratings are for manual operation at 2 mph.

For Total Lock Swivel casters, change "16MSS" to "16MSS/TL" (i.e. 4-16MPSS-NY-P-0320-S to 4-16MSS/TL-NY-P-0320-S)

For rigid casters, change "S" to "R" (i.e. 4-16MPSS-NY-P-0320-S becomes 4-16MPSS-NY-P-0320-R)

All Rig Options should be added to the end of the part number. (i.e. 4-16MPSS-NY-P-0320-SL for Swivel Lock)