


## CONSTRUCTION FEATURES

### Load Capacity Up to 1500 lbs.

- Top Plate: Cold formed from 1/4" steel plate to provide the strongest possible section for swivel bearing
- Swivel Section: 3-1/4" diameter load race. Raceways are coined smooth then heat treated to minimize ball indentation and wear
- Legs: 1/4" steel formed to increase strength and welded to the yoke base
- King bolt: 3/4" heat treated king bolt and nut assembly
- Axle: 1/2" diameter hollow axle with recessed zerk fitting and lock nut on straight roller and ball bearing. Solid axle on Delrin, precision ball, and Oilex bearings
- Lubrication: Zerk fitting in swivel section and in recessed head of hollow axle with straight roller bearing wheels
- Finish: All rigs are zinc plated to resist corrosion and rust.
- Notched Yoke Base: Notched to accommodate swivel lock.
- **Alternate or custom caster configurations available**



SWIVEL CROSS SECTION

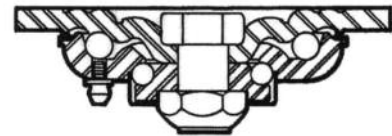

## RIG OPTIONS

- SLW** Swivel Lock Welded
- SLFI** Swivel Lock Field Installable
- NS62** Neoprene Sealed Swivel Section
- IW62** Inside Weld
- TG62** Thread Guards
- ZF07** Hollow axle for oilex and delrin applications specify (For up to 2" wide wheels)
- NSF** Listed for food service industry

## BRAKE OPTIONS

- CB** Cam Brake
- FBB** Face Brake
- SSB** Single Side Brake
- DSB** Double Side Brake
- SLHOFI** Swivel Lock - Hand Operated Field Installable

## Nylacron™ Wheels

With Precision Ball Bearings for Any Application  
(NY/MD, NY/HSB, NY/MC, NY/GF)

Nylacron™ wheels with proper sized precision bearings are made to fit in any rig hub length and axle size.

Nylacron™ wheels have greater load capacity ratings with better rollability while requiring less maintenance and have longer life.

## MOUNTING PLATE (SWIVEL / RIGID)

Top Plate	Plate Size	Bolt Hole Spacing	Bolt Size
62 (Standard)	4 1/2" x 6 1/4"	2 7/16" x 4 15/16" slotted to 3 3/8" x 5 1/4"	1/2"

## OPTIONAL OVERALL HEIGHTS

Wheel Diameter	OAH	Swivel Lead
6"	7-3/4"	1-3/4"
8"	9-1/2"	2-1/4"
8"	9-3/4"	1-3/4"



The Swivel-EAZ™ (Dual-in-One) wheel easily turns a single wheel caster rig into a dual wheel premium urethane tread caster. Available in 4 Durometers: 70A (Black), 80A (Red), 95A (Blue) and 60D (Gray)

## CASTER SPECIFICATIONS

Wheel Type (Wheel Code)	Diameter (in.)	Width (in.)	Capacity (lbs.)	OAH (in.)	Swivel Lead (in.)	Approx. Wt. (lbs.)	Swivel Part Number Add B, P, PL, R or T*
<b>FORGED STEEL (FS) WHEELS WITH ROLLER BEARINGS</b>							
	4	1-1/2	1400	5-5/8	1-5/16	8-1/4	5-62-FS-R-0425-S
	5	1-3/4	1500	6-1/2	1-1/2	10-1/4	5-62-FS-R-0527-S
	6	2	1500	7-1/2	1-3/4	1-1/4	5-62-FS-R-0620-S
<b>CAST IRON (CA) WHEELS WITH ROLLER BEARINGS</b>							
	4	2	1000	5-5/8	1-5/16	8-1/4	5-62-CA-R-0420-S
	5	2	1300	6-1/2	1-1/2	9-1/4	5-62-CA-R-0520-S
	6	2	1400	7-1/2	1-3/4	11-1/4	5-62-CA-R-0620-S
	6	2-1/2	1500	7-1/2	1-3/4	13	5-62-CA-R-0625-S
	8	2	1500	10-1/8	1-3/4	14-1/2	5-62-CA-R-0820-S
	8	2-1/2	1500	10-1/8	1-3/4	16	5-62-CA-R-0825-S
<b>NYLACRON™ MD (NY/MD) WHEELS WITH PRECISION BALL BEARINGS</b>							
	4	2	1500	5-5/8	1-5/16	8-1/4	5-62-NY/MD-P-0420-S
	5	2	1500	6-1/2	1-1/2	8-3/4	5-62-NY/MD-P-0520-S
	6	2	1500	7-1/2	1-3/4	11	5-62-NY/MD-P-0620-S
	6	2-1/2	1500	7-1/2	1-3/4	12	5-62-NY/MD-P-0625-S
	8	2	1500	10-1/8	1-3/4	14	5-62-NY/MD-P-0820-S
	8	2-1/2	1500	10-1/8	1-3/4	15	5-62-NY/MD-P-0825-S
	10	2-1/2	1500	11-1/2	1-3/4	16	5-62-NY/MD-P-1025-S
<b>PHENOLIC / TEXITE (TM) WHEELS WITH ROLLER BEARINGS</b>							
	4	2	800	5-5/8	1-5/16	6-1/4	5-62-TM-R-0420-S
	5	2	1000	6-1/2	1-1/2	6-3/4	5-62-TM-R-0520-S
	6	2	1200	7-1/2	1-3/4	7-3/4	5-62-TM-R-0620-S
	6	2-1/2	1500	7-1/2	1-3/4	9	5-62-TM-R-0625-S
	8	2	1400	10-1/8	1-3/4	9-1/2	5-62-TM-R-0820-S
	8	2-1/2	1500	10-1/8	1-3/4	11-1/4	5-62-TM-R-0825-S
	10	2-1/2	1500	11-1/2	1-3/4	13	5-62-TM-R-1025-S
<b>POLYURETHANE / CAST IRON CORE (PY/CA) WHEELS WITH PRECISION BALL BEARINGS</b>							
	6	2-1/2	1500	7-1/2	1-3/4	13	5-62-PY/CA-P-0625-S
	8	2-1/2	1500	10-1/8	1-3/4	16	5-62-PY/CA-P-0825-S
	10	2-1/2	1500	11-1/2	1-3/4	17	5-62-PY/CA-P-1025-S
<b>POLYURETHANE / ALUMINUM CORE / DONUT TREAD (PY/AL/DT) WHEELS WITH PRECISION BALL BEARINGS</b>							
	5	2	1000	6-1/2	1-1/2	8-1/4	5-62-PY/AL/DT-P-0520-S
	6	2	1250	7-1/2	1-3/4	8-1/4	5-62-PY/AL/DT-P-0620-S
	8	2	1500	10-1/8	1-3/4	8-1/2	5-62-PY/AL/DT-P-0820-S
<b>POLYURETHANE / ALUMINUM CORE (PY/AL) WHEELS WITH PRECISION BALL BEARINGS</b>							
	4	2	700	5-5/8	1-5/16	6-1/2	5-62-PY/AL-P-0420-S
	5	2	1050	6-1/2	1-1/2	6-1/2	5-62-PY/AL-P-0520-S
	6	2	1230	7-1/2	1-3/4	7-1/4	5-62-PY/AL-P-0620-S
	8	2	1500	10-1/8	1-3/4	8-1/2	5-62-PY/AL-P-0820-S
<b>**SWIVEL-EAZ™ (DUAL-IN-ONE) URETHANE 95A / CROWN TREAD (SWE/9/CRN) WHEELS WITH PRECISION BALL BEARINGS</b>							
	4	2	1000	5-5/8	1-1/4	7	5-62-SWE/9/CRN-P-0420-S
	5	2	1100	6-1/2	1-3/8	8	5-62-SWE/9/CRN-P-0520-S
	6	2	1200	7-1/2	1-5/8	9	5-62-SWE/9/CRN-P-0620-S
	8	2	1200	10-1/8	1-3/4	10	5-62-SWE/9/CRN-P-0820-S
<b>**SWIVEL-EAZ™ (DUAL-IN-ONE) URETHANE 80A / CROWN TREAD (SWE/8/CRN) WHEELS WITH PRECISION BALL BEARINGS</b>							
	4	2	500	5-5/8	1-1/4	7	5-62-SWE/8/CRN-P-0420-S
	5	2	700	6-1/2	1-3/8	8	5-62-SWE/8/CRN-P-0520-S
	6	2	1200	7-1/2	1-5/8	9	5-62-SWE/8/CRN-P-0620-S
	8	2	1200	10-1/8	1-3/4	10	5-62-SWE/8/CRN-P-0820-S

\*Add "B" for Ball Bearing, "P" for Precision Bearing, "PL" for Plain Bearing, "R" for Roller Bearing or "T" for Tapered Bearing.

All Rig Options should be added to the end of the part number. (i.e. 5-62-PB-R-0415-SL for Swivel Lock)

This Series is available with Swivel-SAZ™ (Dual-in-One) Wheels, Besthane®, Beathane® Soft, Extrathane® and Extrathane® Soft Wheels.

See Wheel Section for additional information. All load ratings are for manual operation at 2 mph.

\*\*Also available in Flat Tread (70A, 80A, 95A and 60D) and Crown Tread (70A, 80A, 95A and 60D).