

CONSTRUCTION FEATURES

Load Capacity Up to 800 lbs.

- Springs are encapsulated and protected by a urethane SpringGuard™ for added safety
- Fully heat treated double ball raceway construction, extends the life of the caster
- Top plate and legs are made from 1/4" thick cold formed steel
- Standard 4-1/2" x 6-1/4" top plate
- One rig fits 5" x 2" and 6" x 2" wheels
- Applications include diagnostic and electrical, institutional and laboratory, medical equipment and carts, food processing, mobile workstations, mobile storage racks, ground support equipment, packaging equipment, specialty toolboxes



RIG OPTIONS

- SS** Sealed Swivel
HA Hollow Axle
SL Swivel Lock

BRAKE OPTIONS

- SSB** Single Side Brake
DSB Double Side Brake


TOP PLATE

Top Plate: 4-1/2" x 6-1/4"

Bolt Hole Centers: 2-5/8" x 3-5/8"

slotted to 3" x 3"

Attaching Bolt: 3/8"

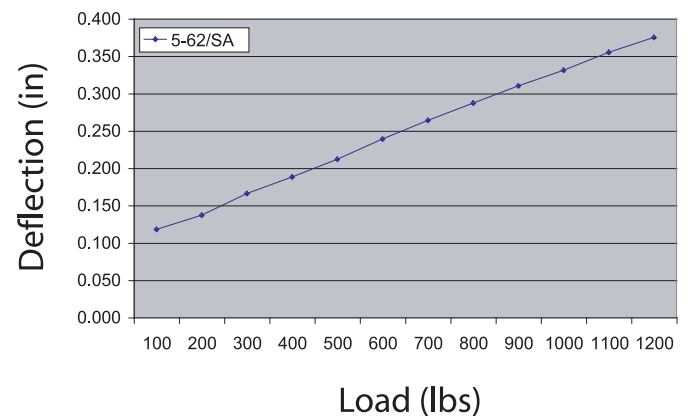

CASTER SPECIFICATIONS

Wheel Type (Wheel Code)	Diameter (in.)	Width (in.)	Capacity (lbs.)	OAH (in.)	Swivel Lead (in.)	Rig Type	Bearing Part Number Add B, P, PL, R or T*
URETHANE 90A / ALUMINUM CORE (UR/9/AL) WITH PRECISION BALL BEARINGS							
	6	2	800	7-7/8	2	Swivel	5-62SA-UR/9/AL-P-0620-S
	6	2	800	7-7/8	2	Rigid	5-62SA-UR/9/AL-P-0620-R
URETHANE 80A / ALUMINUM CORE (UR/8/AL) WITH PRECISION BALL BEARINGS							
	6	2	800	7-7/8	2	Swivel	5-62SA-UR/8/AL-P-0620-S
	6	2	800	7-7/8	2	Rigid	5-62SA-UR/8/AL-P-0620-R
EXTRA SOFT RUBBER / FLAT TREAD (XS/FT) WITH PRECISION BALL BEARINGS							
	6	2	500	7-7/8	2	Swivel	5-62SA-XS/FT-P-0620-S
	6	2	500	7-7/8	2	Rigid	5-62SA-XS/FT-P-0620-R

*Add "B" for Ball Bearing, "P" for Precision Bearing, "PL" for Plain Bearing, "R" for Roller Bearing or "T" for Tapered Bearing.