


CONSTRUCTION FEATURES

Load Capacity Up to 1600 lbs.

- Top Plate: Rugged AISI 1045 Forged Steel for maximum strength
- Swivel Section: Double ball bearing coined “deep-groove” load and machined component thrust raceways
- Legs: 1/4” steel, engineered to increase strength and welded construction
- King Bolt: 3/4” diameter heat treated bolt and nut for enhanced load capacity
- Axle: 1/2” diameter, hollow, with lock nut. Solid axle on Delrin, precision ball, and Oilex bearings
- Lubrication: Zerk fitting in swivel section and in recessed head of hollow axle
- **Alternate or Custom Caster Configurations Available**



SWIVEL CROSS SECTION

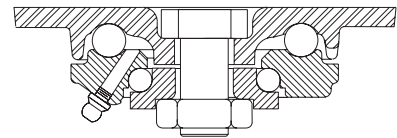

RIG OPTIONS

- NSS** Neoprene Sealed Swivel Section
- NSF** Listed for Food Service Industry
- SLW** Swivel Lock Welded
- SLHOFI** Swivel Lock - Hand Operated
Field Installable
- HT02** Heat Treated Raceway
- ZF07** Hollow Axle

BRAKE OPTIONS

- CB** Cam Brake
- PCB** Poly Cam Brake
- SSB** Single Side Brake
- DSB** Double Side Brake
- WB72** Wrap Around Brake




Nylacron™ Wheels

With Precision Ball Bearings for Any Application
(NY/MD, NY/HSB, NY/MC, NY/GF)

Nylacron™ wheels with proper sized precision bearings are made to fit in any rig hub length and axle size. Nylacron™ wheels have greater load capacity ratings with better rollability while requiring less maintenance and have longer life.

MOUNTING PLATE (SWIVEL / RIGID)

Top Plate	Plate Size	Bolt Hole Spacing	Bolt Size
72 (Standard)	4 1/2" x 6 1/4"	2 7/16" x 4 15/16" slotted to 3 3/8" x 5 1/4"	1/2"
D	5" x 5 1/2"	4 1/8" x 4 1/2"	3/8"
W	4 1/2" x 7 1/4"	3 1/4" x 6"	1/2"



The Swivel-EAZ™ (Dual-in-One) wheel easily turns a single wheel caster rig into a dual wheel premium urethane tread caster.

The Swivel-EAZ™ (Dual-in-One) wheels, designed originally for the automotive industry, is now a best value solution for manual or towing applications (Up to 8 mph) in many other industries.

Available in 4 Durometers:

70A (Black), 80A (Red), 95A (Blue) and 60D (Gray)

Tread Types: CR: Crown or FT: Flat Tread

Axles Sizes: 1/2", 3/4", 1" and 1-1/4"

CASTER SPECIFICATIONS

Wheel Type (Wheel Code)	Diameter (in.)	Width (in.)	Capacity (lbs.)	OAH (in.)	Swivel Lead (in.)	Approx. Wt. (lbs.)	Swivel Part Number Add B, P, PL, R or T*
FORGED STEEL (FS) WHEELS WITH ROLLER BEARING							
	4	1-1/2	1400	5-5/8	1-5/16	8-1/4	5-72-FS-R-0425-S
	5	1-3/4	1500	6-1/2	1-1/2	10-1/4	5-72-FS-R-0527-S
	6	2	1500	7-1/2	1-3/4	1-1/4	5-72-FS-R-0620-S
CAST IRON (CA) WHEELS WITH ROLLER BEARING							
	4	2	1000	5-5/8	1-5/16	8-1/4	5-72-CA-R-0420-S
	5	2	1300	6-1/2	1-1/2	9-1/4	5-72-CA-R-0520-S
	6	2	1400	7-1/2	1-3/4	11-1/4	5-72-CA-R-0620-S
	6	2-1/2	1500	7-1/2	1-3/4	13	5-72-CA-R-0625-S
	8	2	1500	10-1/8	1-3/4	14-1/2	5-72-CA-R-0820-S
	8	2-1/2	1500	10-1/8	1-3/4	16	5-72-CA-R-0825-S
NYLACRON™ MD (NY/MD) WHEELS WITH PRECISION BALL BEARING							
	4	2	1600	5-5/8	1-5/16	8-1/4	5-72-NY/MD-P-0420-S
	5	2	1600	6-1/2	1-1/2	8-3/4	5-72-NY/MD-P-0520-S
	6	2	1600	7-1/2	1-3/4	11	5-72-NY/MD-P-0620-S
	6	2-1/2	1600	7-1/2	1-3/4	12	5-72-NY/MD-P-0625-S
	8	2	1600	10-1/8	1-3/4	14	5-72-NY/MD-P-0820-S
	8	2-1/2	1600	10-1/8	1-3/4	15	5-72-NY/MD-P-0825-S
	10	2-1/2	1600	11-1/2	1-3/4	16	5-72-NY/MD-P-1025-S
PHENOLIC / TEXITE (TM) WHEELS WITH ROLLER BEARING							
	4	2	800	5-5/8	1-5/16	6-1/4	5-72-TM-R-0420-S
	5	2	1000	6-1/2	1-1/2	6-3/4	5-72-TM-R-0520-S
	6	2	1200	7-1/2	1-3/4	7-3/4	5-72-TM-R-0620-S
	6	2-1/2	1500	7-1/2	1-3/4	9	5-72-TM-R-0625-S
	8	2	1400	10-1/8	1-3/4	9-1/2	5-72-TM-R-0820-S
	8	2-1/2	1500	10-1/8	1-3/4	11-1/4	5-72-TM-R-0825-S
	10	2-1/2	1500	11-1/2	1-3/4	13	5-72-TM-R-1025-S
POLYURETHANE / CAST IRON CORE (PY/CA) WHEELS WITH PRECISION BALL BEARING							
	6	2-1/2	1500	7-1/2	1-3/4	13	5-72-PY/CA-P-0625-S
	8	2-1/2	1500	10-1/8	1-3/4	16	5-72-PY/CA-P-0825-S
	10	2-1/2	1500	11-1/2	1-3/4	17	5-72-PY/CA-P-1025-S
POLYURETHANE / ALUMINUM CORE / DONUT TREAD (PY/AL/DT) WHEELS WITH PRECISION BALL BEARING							
	5	2	1000	6-1/2	1-1/2	8-1/4	5-72-PY/AL/DT-P-0520-S
	6	2	1250	7-1/2	1-3/4	8-1/4	5-72-PY/AL/DT-P-0620-S
	8	2	1500	10-1/8	1-3/4	8-1/2	5-72-PY/AL/DT-P-0820-S
POLYURETHANE / ALUMINUM CORE (PY/AL) WHEELS WITH PRECISION BALL BEARING							
	4	2	700	5-5/8	1-5/16	6-1/2	5-72-PY/AL-P-0420-S
	5	2	1050	6-1/2	1-1/2	6-1/2	5-72-PY/AL-P-0520-S
	6	2	1230	7-1/2	1-3/4	7-1/4	5-72-PY/AL-P-0620-S
	8	2	1500	10-1/8	1-3/4	8-1/2	5-72-PY/AL-P-0820-S
**SWIVEL-EAZ™ (DUAL-IN-ONE) URETHANE 95A / FLAT TREAD (SWE/9/FT) WHEELS WITH PRECISION BALL BEARING							
	4	2	1000	5-5/8	1-1/4	7	4-16M-SWE/9/FT-P-0420-S
	5	2	1100	6-1/2	1-3/8	8	4-16M-SWE/9/FT-P-0520-S
	6	2	1200	7-1/2	1-5/8	9	4-16M-SWE/9/FT-P-0620-S
	8	2	1200	10-1/8	1-3/4	10	4-16M-SWE/9/FT-P-0820-S
**SWIVEL-EAZ™ (DUAL-IN-ONE) URETHANE 80A / FLAT TREAD (SWE/8/FT) WHEELS WITH PRECISION BALL BEARING							
	4	2	500	5-5/8	1-1/4	7	4-16M-SWE/8/FT-P-0420-S
	5	2	700	6-1/2	1-3/8	8	4-16M-SWE/8/FT-P-0520-S
	6	2	1200	7-1/2	1-5/8	9	4-16M-SWE/8/FT-P-0620-S
	8	2	1200	10-1/8	1-3/4	10	4-16M-SWE/8/FT-P-0820-S

*Add "B" for Ball Bearing, "P" for Precision Bearing, "PL" for Plain Bearing, "R" for Roller Bearing or "T" for Tapered Bearing.

For rigid casters, change "S" to "R" (i.e. 5-72-PB-R-0415-S becomes 5-72-PB-R-0415-R)

All Rig Options should be added to the end of the part number. (i.e. 5-72-PB-R-0415-SL for Swivel Lock)

This Series is available with Swivel-SAZ™ (Dual-in-One) Wheels, Besthane®, Beathane® Soft, Extrathane® and Extrathane® Soft Wheels.

See Wheel Section for additional information. All load ratings are for manual operation at 2 mph.

**Also available in Flat Tread (70A, 80A, 95A and 60D) and Crown Tread (70A, 80A, 95A and 60D).