


SERIES 23

General Duty Casters

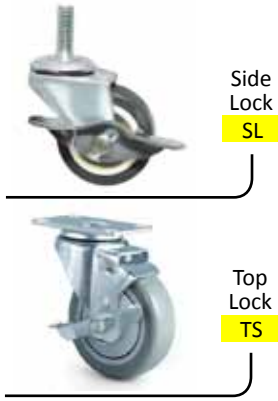

Features

- Lighter gauge steel economical caster series
- Double Ball Bearing Raceway
- Rivet Axle
- Zinc plated

Applications

- Wire Shelf Carts and Maintenance Carts
- Bakery Equipment and Food Service
- Displays
- Office and Computer Equipment
- Institutional and Laboratory Equipment


300 lbs
135 kg

280 lbs
130 kg

**Plates

Plate	Size	Bolt Pattern	Bolt Dia.
01	2-3/8 x 3-5/8	1-3/4 x 2-7/8 to 3	5/16
02	3-1/8 x 4-1/8	1-3/4 x 2-15/16 to 2-3/8 x 3-3/8	5/16
03	4 x 4-1/2	2-5/8 x 3-5/8 to 3 x 3	3/8

**Stems

Stem	Size	Stem Type
40	1/2-13 x 3/4	Threaded Stem
43	1/2-13 x 1-1/2	Threaded Stem
72	7/16 x 1-3/8	Grip Ring Stem

Wheel Dia.	Tread Width	Wheel Type	Load Cap.	OAH	Radius	Bearing	Swivel Part #	Rigid Part #
3	1-1/4	Polyolefin	250	3-3/4	2-1/2	Plain Bore	23CS314PO90-**	23CR314PO90-**
3	1-1/4	Semi Steel	250	3-3/4	2-1/2	Plain Bore	23CS314SS90-**	23CR314SS90-**
3-1/2	1-1/4	Polyolefin	250	4-3/8	3	Plain Bore	23CS3514PO90-**	23CR3514PO90-**
3-1/2	1-1/4	Thermoplastic Rubber	250	4-3/8	3	Plain Bore	23CS3514TPR90-**	23CR3514TPR90-**
3-1/2	1-1/4	DURA TOUGH	250	4-3/8	3	Delrin	23CS3514PTU55-**	23CR3514PPU55-**
4	1-1/4	Polyolefin	275	4-5/8	3-1/4	Plain Bore	23CS414PO90-**	23CR414PO90-**
4	1-1/4	Thermoplastic Rubber	275	4-5/8	3-1/4	Plain Bore	23CS414TPR90-**	23CR414TPR90-**
4	1-1/4	DURA TOUGH	275	4-5/8	3-1/4	Delrin	23CS414PTU55-**	23CR414PPU55-**
5	1-1/4	Polyolefin	280	5-5/8	4-3/16	Plain Bore	23CS514PO90-**	23CR514PO90-**
5	1-1/4	Thermoplastic Rubber	280	5-5/8	4-3/16	Plain Bore	23CS514TPR90-**	23CR514TPR90-**
5	1-1/4	DURA TOUGH	280	5-5/8	4-3/16	Delrin	23CS514PTU55-**	23CR514PPU55-**