


CONSTRUCTION FEATURES

Load Capacity Up to 2000 lbs.

- Single piece forged alloy steel top plate and fork base
- Precision raceways, CNC machined
- Induction hardened raceway ensure longevity of swivel head
- Totally sealed swivel head with grease nipple
- 1/4 in. thick formed legs robotically welded inside and outside to 65mm fork spacing
- 1/2 in. wheel axle
- Finish is zinc plated, ROHS compliant or black polymer color-coated



TL/LE



DL


RIG OPTIONS

- DL** 4-Way Directional Lock
- TL/LE** Adjustable Total Lock / Leading Edge
- WFB** Wheel Face Brake

TOP PLATE OPTIONS

- (Standard)**
- Top Plate:** 4-1/2" x 6-1/4"
- Bolt Hole Centers:** 2-7/16" x 4-15/16" slotted to 3-5/8" x 5-1/4"
- Attaching Bolt:** 1/2"


SWIVEL CROSS SECTION

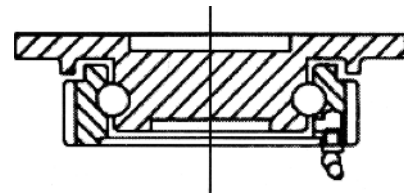

Nylacron™ Wheels

With Precision Ball Bearings for Any Application
(NY/MD, NY/HSB, NY/MC, NY/GF)

Nylacron™ wheels with proper sized precision bearings are made to fit in any rig hub length and axle size. Nylacron™ wheels have greater load capacity ratings with better rollability while requiring less maintenance and have longer life.



The Swivel-EAZ™ (Dual-in-One) wheel easily turns a single wheel caster rig into a dual wheel premium urethane tread caster.

The Swivel-EAZ™ (Dual-in-One) wheels, designed originally for the automotive industry, is now a best value solution for manual or towing applications (Up to 8 mph) in many other industries.

- Available in 4 Durometers:** 70A (Black), 80A (Red), 95A (Blue) and 60D (Gray)
- Tread Types:** CR: Crown or FT: Flat Tread
- Axles Sizes:** 1/2", 3/4", 1" and 1-1/4"

CASTERS with PRECISION BALL BEARING WHEELS

| Swivel Part Number | Rigid Part Number | Swivel Part Number with Rig Option (TL/LE)* | Dia. (in) | Width (in) | OAH (in) | Swl. Red. (in) | Cap. (lb) |
|--|---------------------------|--|--------------|---------------|-------------|-------------------|--------------|
| CAST IRON (CI) WHEELS WITH PRECISION BALL BEARINGS | | | | | | | |
| 5-72KHD-CI-P-0420-S | 5-72KHD-CI-P-0420-R | 5-72KHD-CI-P-0420-S-TL/LE | 4 | 2 | 5-5/8 | 3-3/16 | 1000 |
| 5-72KHD-CI-P-0520-S | 5-72KHD-CI-P-0520-R | 5-72KHD-CI-P-0520-S-TL/LE | 5 | 2 | 6-1/2 | 3-7/8 | 1200 |
| 5-72KHD-CI-P-0620-S | 5-72KHD-CI-P-0620-R | 5-72KHD-CI-P-0620-S-TL/LE | 6 | 2 | 7-1/2 | 4-9/16 | 1750 |
| 5-72KHD-CI-P-0820-S | 5-72KHD-CI-P-0820-R | 5-72KHD-CI-P-0820-S-TL/LE | 8 | 2 | 9-1/2 | 6 | 2000 |
| 5-72KHD-CI-P-1020-S | 5-72KHD-CI-P-1020-R | 5-72KHD-CI-P-1020-S-TL/LE | 10 | 2 | 11-1/2 | 7-1/2 | 2000 |
| DUCTILE IRON (DU) WHEELS WITH PRECISION BALL BEARINGS | | | | | | | |
| 5-72KHD-DU-P-0420-S | 5-72KHD-DU-P-0420-R | 5-72KHD-DU-P-0420-S-TL/LE | 4 | 2 | 5-5/8 | 3-3/16 | 1500 |
| 5-72KHD-DU-P-0520-S | 5-72KHD-DU-P-0520-R | 5-72KHD-DU-P-0520-S-TL/LE | 5 | 2 | 6-1/2 | 3-7/8 | 1550 |
| 5-72KHD-DU-P-0620-S | 5-72KHD-DU-P-0620-R | 5-72KHD-DU-P-0620-S-TL/LE | 6 | 2 | 7-1/2 | 4-9/16 | 2000 |
| 5-72KHD-DU-P-0820-S | 5-72KHD-DU-P-0820-R | 5-72KHD-DU-P-0820-S-TL/LE | 8 | 2 | 9-1/2 | 6 | 2000 |
| 5-72KHD-DU-P-1020-S | 5-72KHD-DU-P-1020-R | 5-72KHD-DU-P-1020-S-TL/LE | 10 | 2 | 11-1/2 | 7-1/2 | 2000 |
| NYLACRON™ (NY/MD) WHEELS WITH PRECISION BALL BEARINGS | | | | | | | |
| 5-72KHD-NY/MD-P-0420-S | 5-72KHD-NY/MD-P-0420-R | 5-72KHD-NY/MD-P-0420-S-TL/LE | 4 | 2 | 5-5/8 | 3-3/16 | 1800 |
| 5-72KHD-NY/MD-P-0520-S | 5-72KHD-NY/MD-P-0520-R | 5-72KHD-NY/MD-P-0520-S-TL/LE | 5 | 2 | 6-1/2 | 3-7/8 | 2000 |
| 5-72KHD-NY/MD-P-0620-S | 5-72KHD-NY/MD-P-0620-R | 5-72KHD-NY/MD-P-0620-S-TL/LE | 6 | 2 | 7-1/2 | 4-9/16 | 2000 |
| 5-72KHD-NY/MD-P-0820-S | 5-72KHD-NY/MD-P-0820-R | 5-72KHD-NY/MD-P-0820-S-TL/LE | 8 | 2 | 9-1/2 | 6 | 2000 |
| HEAVY DUTY URETHANE / CAST IRON CORE (UR/HD/CA) WHEELS WITH PRECISION BALL BEARINGS | | | | | | | |
| 5-72KHD-UR/HD/CA-P-0420-S | 5-72KHD-UR/HD/CA-P-0420-R | 5-72KHD-UR/HD/CA-P-0420-S-TL/LE | 4 | 2 | 5-5/8 | 3-3/16 | 900 |
| 5-72KHD-UR/HD/CA-P-0520-S | 5-72KHD-UR/HD/CA-P-0520-R | 5-72KHD-UR/HD/CA-P-0520-S-TL/LE | 5 | 2 | 6-1/2 | 3-7/8 | 1200 |
| 5-72KHD-UR/HD/CA-P-0620-S | 5-72KHD-UR/HD/CA-P-0620-R | 5-72KHD-UR/HD/CA-P-0620-S-TL/LE | 6 | 2 | 7-1/2 | 4-9/16 | 1650 |
| 5-72KHD-UR/HD/CA-P-0820-S | 5-72KHD-UR/HD/CA-P-0820-R | 5-72KHD-UR/HD/CA-P-0820-S-TL/LE | 8 | 2 | 9-1/2 | 6 | 2000 |
| 5-72KHD-UR/HD/CA-P-1020-S | 5-72KHD-UR/HD/CA-P-1020-R | 5-72KHD-UR/HD/CA-P-1020-S-TL/LE | 10 | 2 | 11-1/2 | 7-1/2 | 2000 |
| URETHANE / CAST IRON CORE / DONUT TREAD (UR/CA/DT) WHEELS WITH PRECISION BALL BEARINGS | | | | | | | |
| 5-72KHD-UR/CA/DT-P-0420-S | 5-72KHD-UR/CA/DT-P-0420-R | 5-72KHD-UR/CA/DT-P-0420-S-TL/LE | 4 | 2 | 5-5/8 | 3-3/16 | 775 |
| 5-72KHD-UR/CA/DT-P-0520-S | 5-72KHD-UR/CA/DT-P-0520-R | 5-72KHD-UR/CA/DT-P-0520-S-TL/LE | 5 | 2 | 6-1/2 | 3-7/8 | 1000 |
| 5-72KHD-UR/CA/DT-P-0620-S | 5-72KHD-UR/CA/DT-P-0620-R | 5-72KHD-UR/CA/DT-P-0620-S-TL/LE | 6 | 2 | 7-1/2 | 4-9/16 | 1250 |
| 5-72KHD-UR/CA/DT-P-0820-S | 5-72KHD-UR/CA/DT-P-0820-R | 5-72KHD-UR/CA/DT-P-0820-S-TL/LE | 8 | 2 | 9-1/2 | 6 | 1700 |
| 5-72KHD-UR/CA/DT-P-1020-S | 5-72KHD-UR/CA/DT-P-1020-R | 5-72KHD-UR/CA/DT-P-1020-S-TL/LE | 10 | 2 | 11-1/2 | 7-1/2 | 1750 |
| **SWIVEL-EAZ™ (DUAL-IN-ONE) 95A / FLAT TREAD (SWE/9/FT) WHEELS WITH PRECISION BALL BEARINGS | | | | | | | |
| 5-72KHD-SWE/9/FT-P-0420-S | 5-72KHD-SWE/9/FT-P-0420-R | 5-72KHD-SWE/9/FT-P-0420-S-TL/LE | 4 | 2 | 5-5/8 | 3-5/8 | 1000 |
| 5-72KHD-SWE/9/FT-P-0520-S | 5-72KHD-SWE/9/FT-P-0520-R | 5-72KHD-SWE/9/FT-P-0520-S-TL/LE | 5 | 2 | 6-1/2 | 4-5/8 | 1100 |
| 5-72KHD-SWE/9/FT-P-0620-S | 5-72KHD-SWE/9/FT-P-0620-R | 5-72KHD-SWE/9/FT-P-0620-S-TL/LE | 6 | 2 | 7-1/2 | 5-1/4 | 1200 |
| 5-72KHD-SWE/9/FT-P-0820-S | 5-72KHD-SWE/9/FT-P-0820-R | 5-72KHD-SWE/9/FT-P-0820-S-TL/LE | 8 | 2 | 9-1/2 | 6-9/16 | 1200 |
| MOLDON RUBBER / CAST IRON CORE (MR/CA) WHEELS WITH PRECISION BALL BEARINGS | | | | | | | |
| 5-72KHD-MR/CA-P-0420-S | 5-72KHD-MR/CA-P-0420-R | 5-72KHD-MR/CA-P-0420-S-TL/LE | 4 | 2 | 5-5/8 | 3-3/16 | 350 |
| 5-72KHD-MR/CA-P-0520-S | 5-72KHD-MR/CA-P-0520-R | 5-72KHD-MR/CA-P-0520-S-TL/LE | 5 | 2 | 6-1/2 | 3-7/8 | 400 |
| 5-72KHD-MR/CA-P-0620-S | 5-72KHD-MR/CA-P-0620-R | 5-72KHD-MR/CA-P-0620-S-TL/LE | 6 | 2 | 7-1/2 | 4-9/16 | 450 |
| 5-72KHD-MR/CA-P-0820-S | 5-72KHD-MR/CA-P-0820-R | 5-72KHD-MR/CA-P-0820-S-TL/LE | 8 | 2 | 9-1/2 | 6 | 525 |
| 5-72KHD-MR/CA-P-1020-S | 5-72KHD-MR/CA-P-1020-R | 5-72KHD-MR/CA-P-1020-S-TL/LE | 10 | 2 | 11-1/2 | 7-1/2 | 700 |
| ELASTIC RUBBER / CAST IRON CORE (ER/CA) WHEELS WITH PRECISION BALL BEARINGS | | | | | | | |
| 5-72KHD-ER/CA-P-0420-S | 5-72KHD-ER/CA-P-0420-R | 5-72KHD-ER/CA-P-0420-S-TL/LE | 4 | 2 | 5-5/8 | 3-3/16 | 460 |
| 5-72KHD-ER/CA-P-0520-S | 5-72KHD-ER/CA-P-0520-R | 5-72KHD-ER/CA-P-0520-S-TL/LE | 5 | 2 | 6-1/2 | 3-7/8 | 600 |
| 5-72KHD-ER/CA-P-0620-S | 5-72KHD-ER/CA-P-0620-R | 5-72KHD-ER/CA-P-0620-S-TL/LE | 6 | 2 | 7-1/2 | 4-9/16 | 775 |
| 5-72KHD-ER/CA-P-0820-S | 5-72KHD-ER/CA-P-0820-R | 5-72KHD-ER/CA-P-0820-S-TL/LE | 8 | 2 | 9-1/2 | 6 | 1000 |
| 5-72KHD-ER/CA-P-1020-S | 5-72KHD-ER/CA-P-1020-R | 5-72KHD-ER/CA-P-1020-S-TL/LE | 10 | 2 | 11-1/2 | 7-1/2 | 1100 |

*Add "B" for Ball Bearing, "P" for Precision Bearing, "PL" for Plain Bearing, "R" for Roller Bearing or "T" for Tapered Bearing.

This Series is available with Besthane®, Beathane® Soft, Extrathane® and Extrathane® Soft Wheels.

**Also available in Flat Tread (70A, 80A, 95A and 60D) and Crown Tread (70A, 80A, 95A and 60D).