


The **Scene Shifter**, utilizing the 05/72V Swivel Head and either 2LL or BS4 casters has applications in Stage Productions, Conference Centers and Exhibition Halls. **Acorn™ can provide Tri-Wheel Dollies with any size swivel casters and load capacities to meet job requirements.**

**Below:** Recommended with Nylacron™ wheels for better rollability.

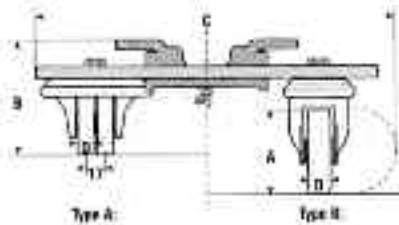

## Type A: Scene Shifter with Low-Level 13DC-2LL Dual Wheel Casters

Diameter mm/in	OAH (mm)	Swivel Radius (mm)	Tread Width (mm)	Wheel Type	Load Capacity (lb)	Part Number *(Add R, P or PL)
50 / 2	96	308	14	Nylon (NN)	800	13DC-2LL-NN/050/14-PL
50 / 2	96	308	14	Vulkollan™ / CI Core (VY/CI)	800	13DC-2LL-VY/CI/050/14-PL
50 / 2	96	308	14	Steel (ST)	800	13DC-2LL-ST/050/14-PL

\* R= Roller bearing, P= Precision ball bearing, PL = Plain bushing

## Type B: Scene Shifter with 13DC-BS-4 Casters

Diameter mm/in	OAH (mm)	Swivel Radius (mm)	Tread Width (mm)	Wheel Type	Load Capacity (lb)	Part Number *(Add R, P or PL)
100 / 4	168	436	35	Nylon (NN)	1000	13DC-BS4-NN/100/35-R
100 / 4	168	436	29	Vulkollan™ / CI Core (VY/CI)	1000	13DC-BS4-VY/100/29-R
125 / 5	193	464	35	Nylon (NN)	1000	13DC-BS4-NN/125/35-R
125 / 5	193	464	35	Urethane / CI Core (UY/CI)	1000	13DC-BS4-UY/CI/125/35-R
125 / 5	193	464	32	Vulkollan™ / CI Core (VY/CI)	1000	13DC-BS4-VY/CI/125/32-R

\* R= Roller bearing, P= Precision ball bearing, PL = Plain bushing

**CAD DRAWINGS FOR CUSTOM STAGE / SCENE SHIFTING CASTERS & DOLLIES ARE AVAILABLE**

**SEE SECTION 13 FOR ADDITIONAL STAGE / SCENE SHIFTING CASTERS & DOLLIES**

